


Electronic Hotel Lock

HL 100

Dimensions:

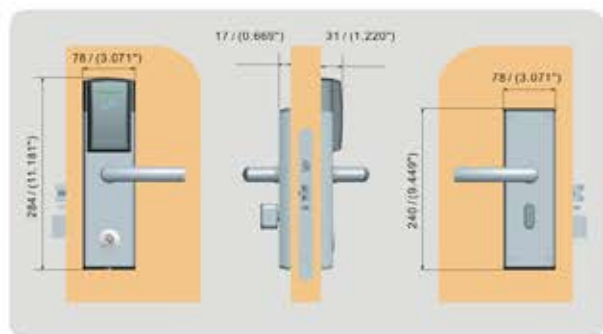

Specification

Power : 4 x 1.5V AA alkaline batteries

Battery Location : Inside of the back lock

Material : Handles - Stainless steel quality SUS304

Lock Body : Stainless steel quality SUS304

Metal Finishes : Silver, Gold, Matte Black

Emergency Opening Options : Emergency Opening with Mechanical cylinder

Locking Mechanism : Electro-mechanical locking mechanism

Door Thickness : 35-80mm (only for EURO mortise)

System Software Compatibility : BIS Hotel

Storage Temperature : Workable -20°C-60°C : Non-condensing environment

Tested Operating Temperature : Tested from -25°C-70°C

Certifications : Approved according to EN14846.

Fire approved according to EN 1634-1

Fire Approved according to UL (timber doors)

Supported RFID Standard : ISO 14443 (MIFARE Classic)

Features :

- Stand alone electronic lock with RFID technology.
- High security stainless steel mortise lockcase available in ANSI, AUS and EURO versions.
- Stainless steel handle with high strength central spindle.
- 3-point stainless steel latch construction with antifriction mechanism.
- Mortise equipped 20mm throw high strength deadbolt.
- Panic release function - the deadbolt and latch are automatically retracted by inside handle for easy regress in emergency situation.
- ADA compliant (guest with physical disabilities).
- Future proof re-programmable FLASH RAM lock memory.
- Powered by four AA batteries that provide up to 1 year normal life time.
- 414 events audit trail.

RFID Specifications:

- 13.56MHz technology
- Compatible with the following standard : ISO 14443 A (MIFARE Classic)
- Eleven free sectors for future All-in-one card application use